



# RL 21200G (2V1200Ah)

RL21200G is GEL standby battery with 18~20 years floating design life time .The solid Gel protects no way to suffer electrolyte stratification and ensure mild corrosion, its special separator eradicates infection between plates to prevent short circuit. it offers extra-durable performance under extreme temperature.



## Specification

Cells Per Unit	1
Voltage Per Unit	2
Capacity	1200Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 76 Kg
Max. Discharge Current	4800 A (5 sec)
Internal Resistance	Approx. 0.81 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float Charging Voltage	2.27 to 2.3 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	240 A
Equalization and Cycle Service	2.37 to 2.4 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Thread insert & Bolt (F10)
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539




G4M20206-0910-E-16



ISO9001:2000 Certificate

## Dimensions

Unit: mm Dimension: 479(L)×175(W)×327(H)

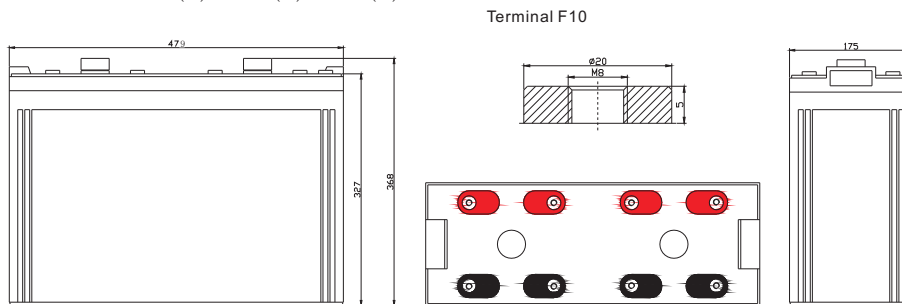

## Constant Current Discharge Characteristics : A(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	1466	1135	730.7	434.4	323.5	257.9	217.2	182.4	147.2	123.1	63.38
1.65V	1394	1090	699.1	418.5	309.9	248.9	208.1	178.0	140.7	118.7	61.12
1.70V	1300	1028	685.5	411.7	303.2	246.6	205.9	173.6	138.5	116.5	59.99
1.75V	1154	913.6	631.2	389.1	287.3	233.0	196.8	164.8	134.1	114.3	58.85
1.80V	993.6	842.4	595.0	371.0	276.0	230.8	190.0	162.6	131.9	109.9	56.59
1.85V	840.3	758.4	549.7	350.7	262.4	212.7	181.0	153.8	125.3	105.5	54.33

## Constant Power Discharge Characteristics : W(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	2567	2019	1305	785.0	588.2	472.8	400.4	345.0	274.7	233.0	120.0
1.65V	2500	2008	1301	773.7	585.9	468.3	395.9	340.6	272.5	230.8	118.8
1.70V	2361	1868	1260	762.4	567.8	461.5	391.4	334.0	268.1	228.6	117.7
1.75V	2104	1683	1176	728.5	547.5	445.7	375.5	318.7	261.5	222.0	114.3
1.80V	1821	1551	1109	696.8	524.9	432.1	364.2	312.1	252.7	215.4	110.9
1.85V	1553	1398	1023	656.1	500.0	398.2	348.4	294.5	241.7	208.8	107.5


All mentioned values are average values.

# RL 21200G


2V1200Ah




## Effect of temperature on long term float life

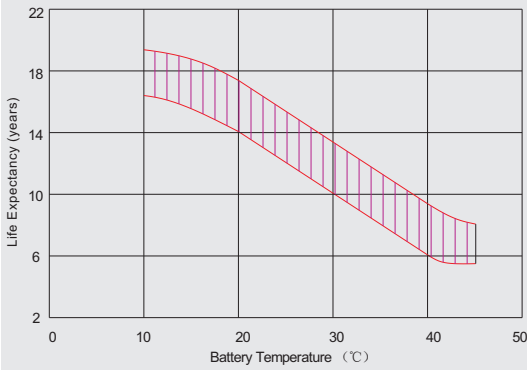


## Storage characteristic

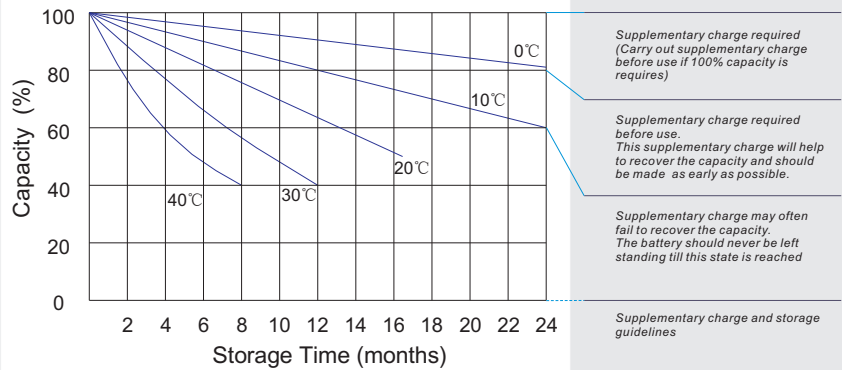

## Charge characteristic Curve for standby use

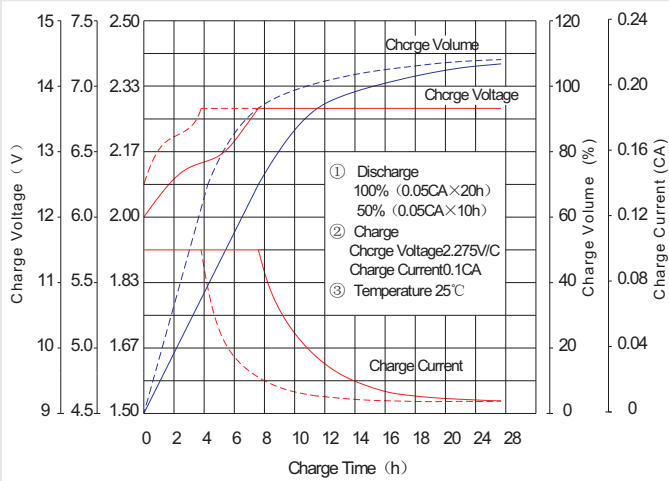

## Discharge characteristic Curve

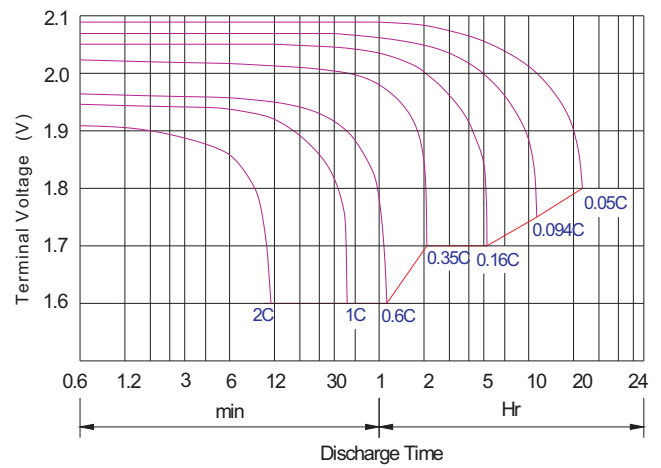

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

## Maintenance & Cautions

<b>Float Service:</b>
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

**Charge the batteries at least once every six months, if they are stored at 25°C.**

## Charging Method:

Constant Voltage	-0.2Cx2h+2.40~2.45V,24h,Max. Current 0.2CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h