



RA12-185FG (12V185Ah)

RA12-185FG is GEL standby battery with 10 + years floating design life time .The solid Gel protects no way to suffer electrolyte stratification and ensure mild corrosion, its special separator eradicates infection between plates to prevent short circuit. it offers extra-durable performance under extreme temperature.



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	185Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 60 Kg
Max. Discharge Current	1850 A (5 sec)
Internal Resistance	Approx. 4mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge:-20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	37A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F9
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539




G4M20206-0910-E-16





ISO9001:2000 Certificate

Dimensions

Unit: mm Dimension: 560(L)×125(W)×316(H)

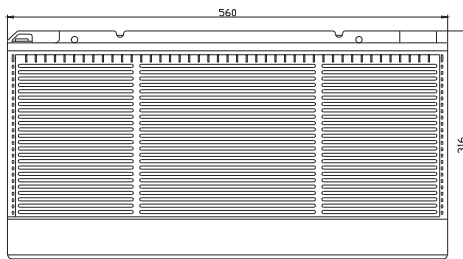

Terminal F9



Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	463.8	331.9	266.4	178.6	108.9	65.14	45.02	36.90	30.20	20.80	17.59	9.675
10.0V	450.4	315.8	261.0	175.7	108.4	64.65	44.85	36.73	30.02	20.63	17.42	9.499
10.2V	437.1	304.7	256.9	175.9	107.3	64.16	44.50	36.56	29.85	20.47	17.25	9.323
10.5V	397.1	284.5	247.5	173.2	106.3	63.67	44.33	36.21	29.49	20.30	17.08	9.147
10.8V	362.6	262.5	230.8	167.2	103.8	62.52	43.12	35.36	28.96	19.96	16.91	8.971
11.1V	313.1	237.3	209.4	158.1	98.6	59.75	41.23	33.65	27.71	19.11	16.41	8.443


Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	4797	3535	2931	2036	1258	767.7	535.8	439.8	360.3	248.4	210.2	116.0
10.0V	4703	3427	2884	2012	1255	763.7	535.9	439.3	359.4	247.2	208.9	114.0
10.2V	4649	3336	2851	2018	1245	759.1	533.6	438.3	358.2	245.6	207.0	111.9
10.5V	4282	3144	2752	1990	1234	753.6	531.5	434.2	353.9	243.6	205.0	109.8
10.8V	3946	2932	2573	1926	1211	743.9	517.1	424.3	347.5	239.5	203.0	107.7
11.1V	3505	2681	2343	1826	1159	716.3	494.7	403.8	332.6	229.3	196.9	101.3


All mentioned values are average values.




Effect of temperature on long term float life

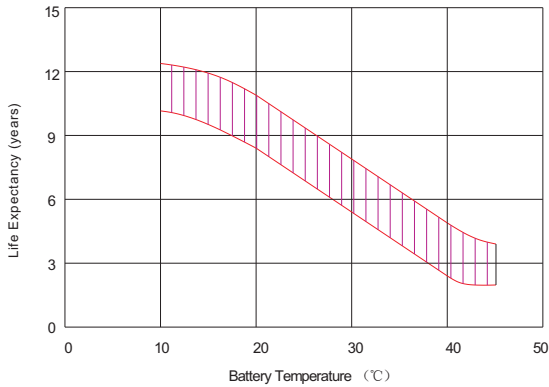


Storage characteristic

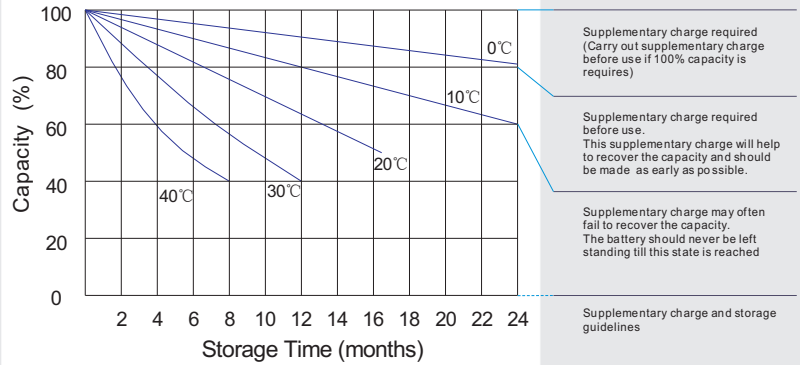

Charge characteristic Curve for standby use

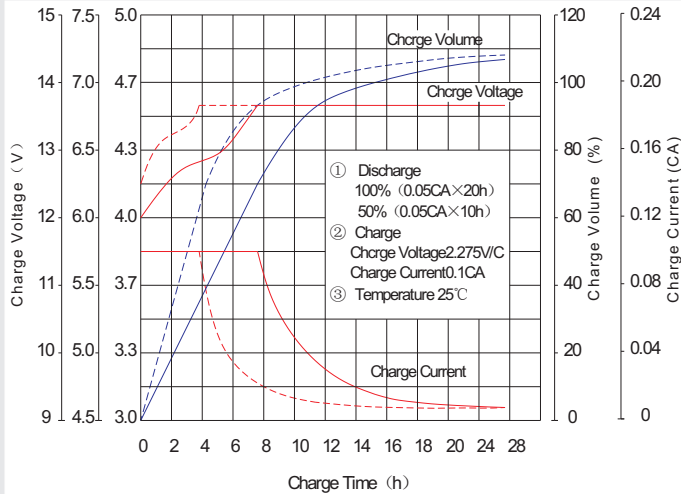

Discharge characteristic Curve

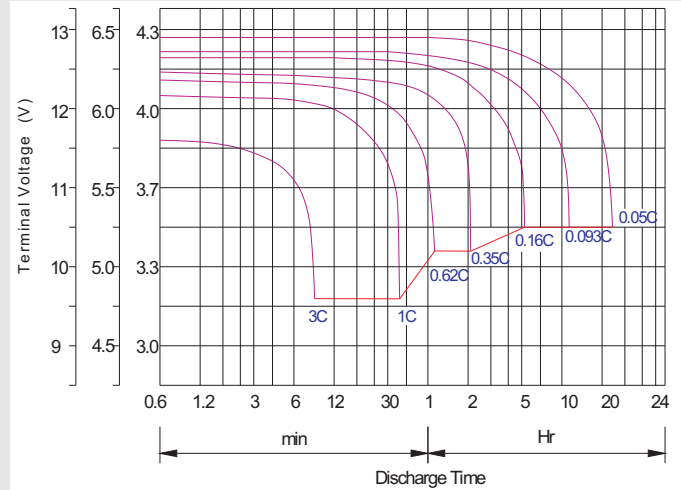

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Float Service:
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.2CA, constant voltage 2.35-2.4V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h