



RA12-200DG (12V200Ah)

RA12-200DG is GEL Deep cycle battery superiorly designed for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use. 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery, that is more suitable for solar, mobility, E-toll, marine, deep discharge UPS etc..







Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	200Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 60.0 Kg
Max. Discharge Current	2000 A (5 sec)
Internal Resistance	Approx. 6 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge:-20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	40A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F12/F16
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



Dimensions

Unit: mm Dimension: 522(L)×240(W)×219(H)

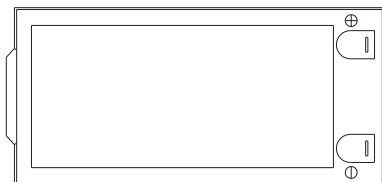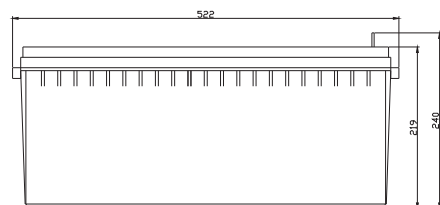

Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	501.4	358.8	288.1	193.0	117.7	70.42	48.67	39.89	32.65	22.49	19.02	10.46
10.0V	486.9	341.4	282.1	190.0	117.1	69.89	48.49	39.70	32.46	22.31	18.83	10.27
10.2V	472.5	329.4	277.7	190.2	116.1	69.36	48.11	39.52	32.27	22.12	18.65	10.08
10.5V	429.3	307.5	267.5	187.2	115.0	68.83	47.93	39.15	31.88	21.94	18.47	9.889
10.8V	392.0	283.7	249.5	180.7	112.2	67.59	46.62	38.23	31.31	21.58	18.29	9.699
11.1V	338.5	256.5	226.3	170.9	106.6	64.59	44.57	36.38	29.96	20.66	17.74	9.128

Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	5186	3822	3169	2201	1360	830.0	579.2	475.5	389.5	268.5	227.2	125.4
10.0V	5084	3704	3118	2175	1357	825.6	579.4	474.9	388.5	267.2	225.8	123.2
10.2V	5026	3607	3083	2181	1346	820.6	576.9	473.8	387.2	265.5	223.8	120.9
10.5V	4629	3398	2975	2151	1334	814.7	574.6	469.4	382.6	263.3	221.6	118.7
10.8V	4266	3169	2782	2082	1309	804.3	559.0	458.7	375.7	258.9	219.4	116.4
11.1V	3790	2899	2533	1974	1253	774.4	534.8	436.6	359.5	247.9	212.8	109.5


All mentioned values are average values.

RA12-200DG


12V200Ah



Life characteristics of cyclic use

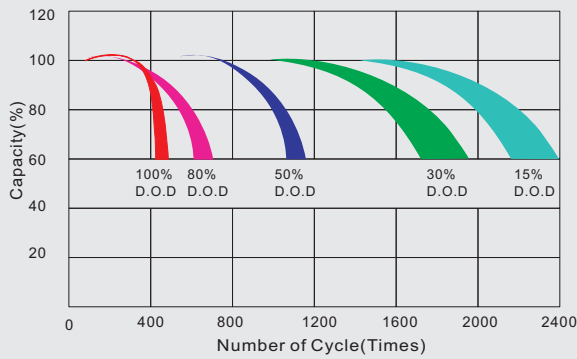


Storage characteristic

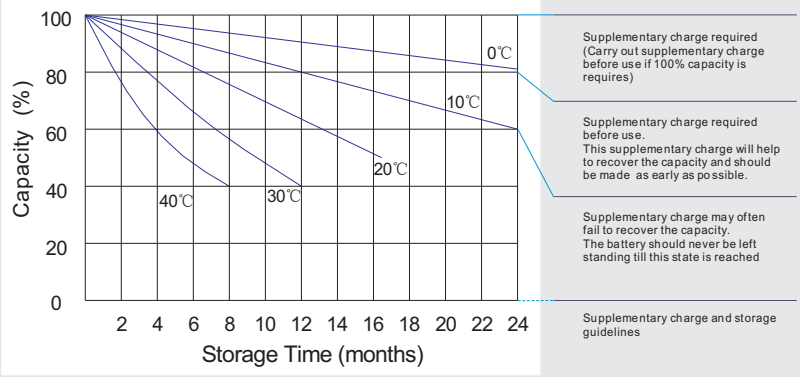

Charge characteristic curve for cyclic use



Discharge characteristic curve

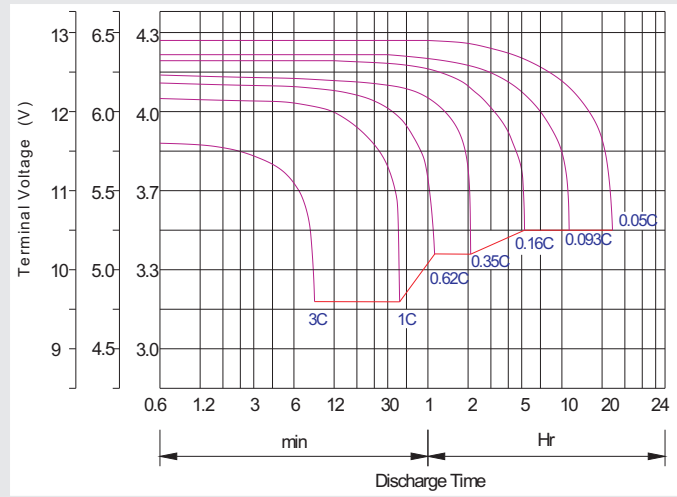

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h