



# RA12-110FDG (12V110Ah)

RA12-110FDG is GEL Deep cycle battery superiorly designed for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use. 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery, that is more suitable for solar, mobility, E-toll, marine, deep discharge UPS etc..



## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	110Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 33.0 Kg
Max. Discharge Current	1100 A (5 sec)
Internal Resistance	Approx. 7.5 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	22A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F9
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539




G4M20206-0910-E-16



ISO9001:2000 Certificate

## Dimensions

Unit: mm Dimension: 394(L)×109(W)×285(H)

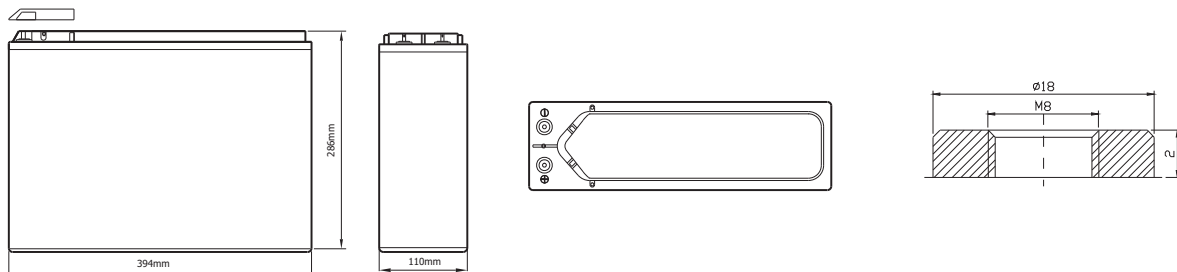

### Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	275.79	197.36	158.43	106.17	64.724	38.730	26.770	21.939	17.958	12.370	10.459	5.7526
10.0V	267.81	187.78	155.18	104.49	64.426	38.439	26.667	21.838	17.852	12.269	10.359	5.6480
10.2V	259.87	181.16	152.74	104.59	63.828	38.147	26.462	21.736	17.747	12.169	10.258	5.5434
10.5V	236.10	169.15	147.14	102.97	63.231	37.856	26.359	21.533	17.535	12.068	10.157	5.4388
10.8V	215.58	156.06	137.21	99.40	61.737	37.177	25.641	21.025	17.218	11.867	10.057	5.3342
11.1V	186.19	141.10	124.49	94.01	58.650	35.526	24.513	20.009	16.479	11.364	9.755	5.0204

### Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	2852.5	2101.9	1742.7	1210.3	747.93	456.49	318.56	261.52	214.24	147.70	124.99	68.973
10.0V	2796.3	2037.5	1714.7	1196.5	746.14	454.07	318.67	261.18	213.69	146.99	124.20	67.776
10.2V	2764.4	1983.7	1695.4	1199.6	740.37	451.34	317.28	260.62	212.96	146.02	123.10	66.521
10.5V	2546.2	1869.1	1636.2	1183.1	733.72	448.06	316.05	258.18	210.42	144.82	121.89	65.266
10.8V	2346.1	1743.2	1529.9	1145.1	720.18	442.35	307.44	252.30	206.62	142.40	120.68	64.011
11.1V	2084.3	1594.4	1393.0	1085.8	689.35	425.92	294.16	240.11	197.75	136.37	117.06	60.245


All mentioned values are average values.

# RA12-110FDG


12V110Ah



## Life characteristics of cyclic use

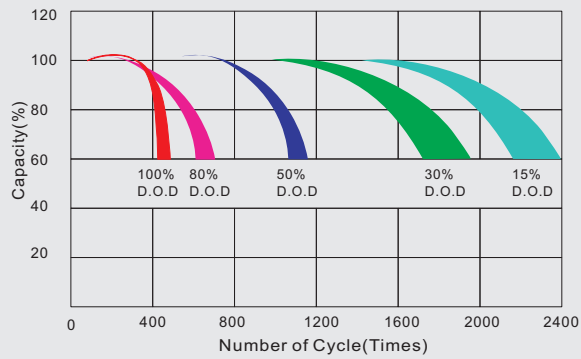


## Storage characteristic

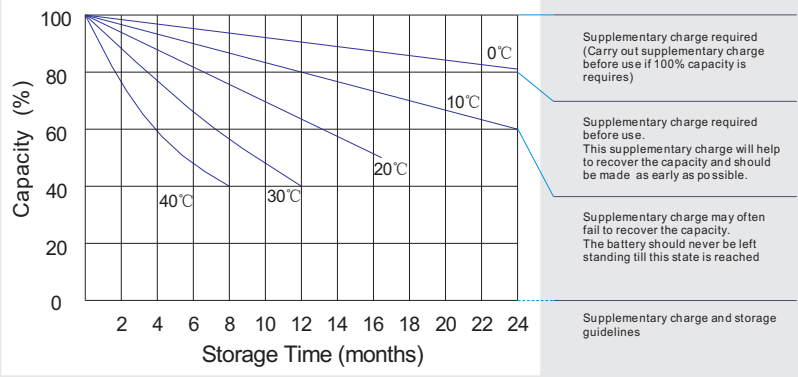

## Charge characteristic curve for cyclic use



## Discharge characteristic curve

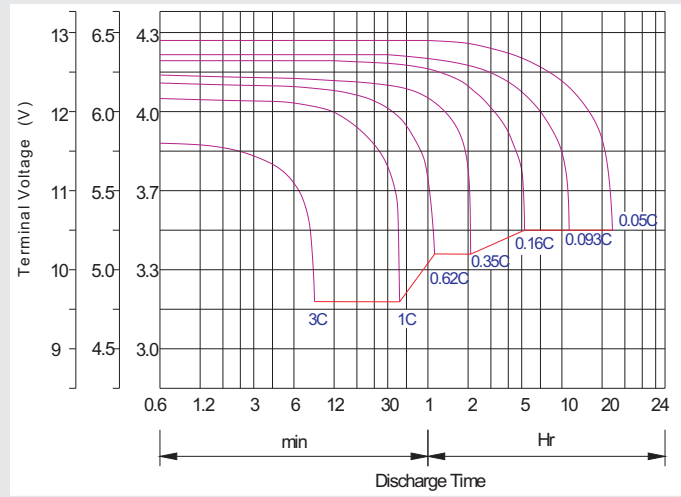

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

## Maintenance & Cautions

### Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.

**Charge the batteries at least once every six months, if they are stored at 25°C.**

### Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h