



RA12-135FDG (12V135Ah)

RA12-135FDG is GEL Deep cycle battery superiorly designed for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use. 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery, that is more suitable for solar, mobility, E-toll, marine, deep discharge UPS etc..



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	135Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 41.0 Kg
Max. Discharge Current	1350 A (5 sec)
Internal Resistance	Approx. 6 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	27 A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F9
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539




G4M20206-0910-E-16




ISO9001:2000 Certificate

Dimensions

Unit: mm Dimension: 551(L)×109(W)×239(H)

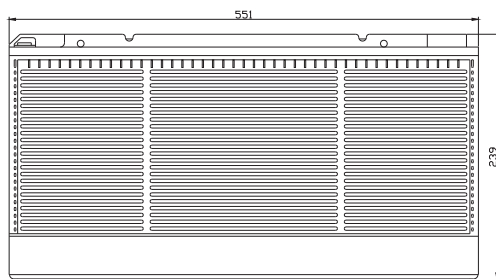

Terminal F9



Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	338.46	242.21	194.43	130.30	79.434	47.532	32.854	26.926	22.039	15.181	12.836	7.0600
10.0V	328.68	230.46	190.45	128.24	79.068	47.175	32.728	26.801	21.910	15.058	12.713	6.9316
10.2V	318.94	222.33	187.45	128.36	78.335	46.817	32.476	26.676	21.780	14.934	12.589	6.8033
10.5V	289.76	207.60	180.58	126.37	77.601	46.460	32.350	26.427	21.521	14.811	12.466	6.6749
10.8V	264.58	191.53	168.39	121.99	75.768	45.626	31.469	25.804	21.132	14.564	12.343	6.5465
11.1V	228.51	173.16	152.78	115.38	71.980	43.601	30.084	24.557	20.224	13.947	11.972	6.1614


Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	3500.8	2579.6	2138.8	1485.4	917.91	560.24	390.96	320.95	262.93	181.26	153.39	84.649
10.0V	3431.8	2500.5	2104.4	1468.4	915.72	557.27	391.10	320.54	262.26	180.39	152.43	83.179
10.2V	3392.6	2434.5	2080.7	1472.3	908.64	553.91	389.39	319.85	261.36	179.21	151.07	81.639
10.5V	3124.9	2293.9	2008.1	1452.0	900.47	549.89	387.88	316.86	258.25	177.73	149.59	80.099
10.8V	2879.2	2139.4	1877.6	1405.3	883.85	542.88	377.31	309.64	253.58	174.77	148.11	78.558
11.1V	2558.0	1956.7	1709.6	1332.6	846.02	522.71	361.01	294.68	242.69	167.36	143.67	73.937

All mentioned values are average values.



Life characteristics of cyclic use

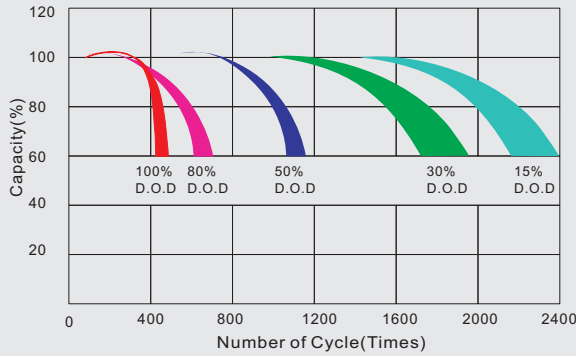


Storage characteristic



Charge characteristic curve for cyclic use



Discharge characteristic curve

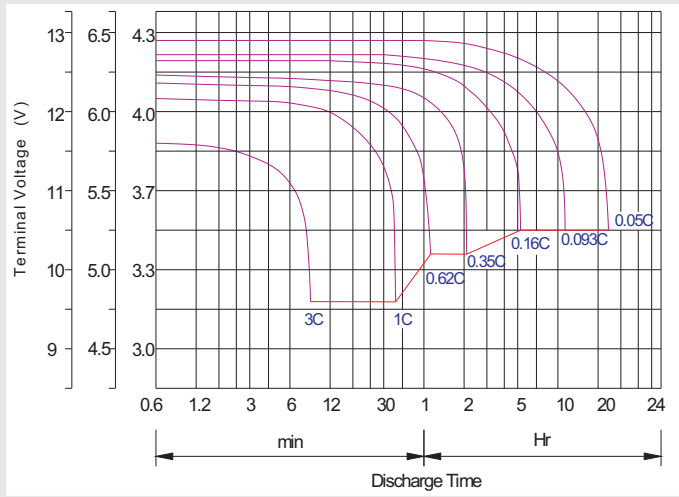

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h