



RA12-145D (12V145Ah)

RA12-145D is AGM Deep cycle battery with 10 years floating design life, specially designed for frequent cyclic discharge usage. By using strong grid and specific paste plate, it makes battery have 30% more cyclic life time than standby series. It is applicable for solar energy system, golf cart, electric wheelchair, etc..



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	145Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 44.0 Kg
Max. Discharge Current	1450 A (5 sec)
Internal Resistance	Approx. 4 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	43.5 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F5/F12
Container Material	A.B.S. (UL94-HB) , Flammability resistance of UL94-V1 can be available upon request.



MH28539






G4M20206-0910-E-16




ISO9001:2000 Certificate

Dimensions


Unit: mm Dimension: 340(L)×173(W)×280(H)

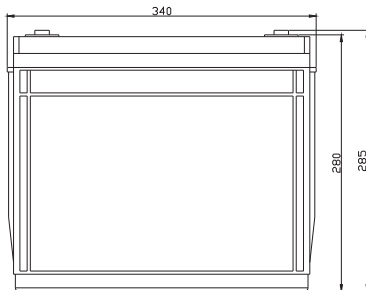

Terminal F12



Terminal F5



Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	427.8	319.1	263.1	163.4	94.25	56.40	38.98	31.95	26.15	18.01	15.23	8.376
10.0V	415.4	303.6	257.7	160.7	93.82	55.97	38.83	31.80	25.99	17.87	15.08	8.224
10.2V	403.1	292.9	253.6	159.2	92.95	55.55	38.53	31.65	25.84	17.72	14.94	8.072
10.5V	361.9	270.3	241.5	155.3	92.08	55.12	38.38	31.35	25.53	17.57	14.79	7.919
10.8V	326.7	246.4	222.6	148.4	89.90	54.14	37.34	30.62	25.07	17.28	14.64	7.767
11.1V	278.9	220.3	199.6	139.1	85.41	51.73	35.69	29.14	24.00	16.55	14.20	7.310

Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	4424	3398	2894	1862	1089	664.7	463.9	380.8	312.0	215.1	182.0	100.4
10.0V	4337	3294	2847	1840	1087	661.2	464.0	380.3	311.2	214.0	180.8	98.7
10.2V	4288	3207	2815	1827	1078	657.2	462.0	379.5	310.1	212.6	179.2	96.9
10.5V	3903	2986	2685	1784	1068	652.4	460.2	375.9	306.4	210.9	177.5	95.0
10.8V	3555	2753	2482	1710	1049	644.1	447.7	367.4	300.9	207.4	175.7	93.2
11.1V	3123	2489	2234	1606	1004	620.2	428.3	349.6	287.9	198.6	170.5	87.7


All mentioned values are average values.

RA12-145D


12V145Ah



Life characteristics of cyclic use

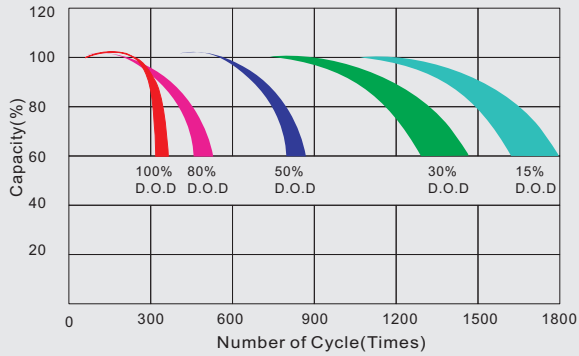


Storage characteristic

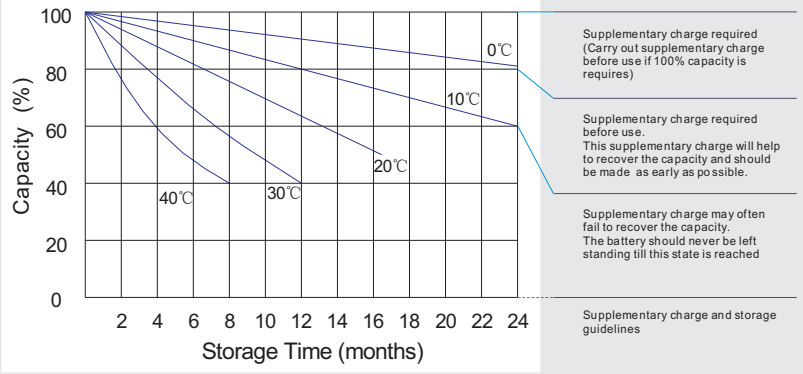

Charge characteristic curve for cyclic use



Discharge characteristic curve

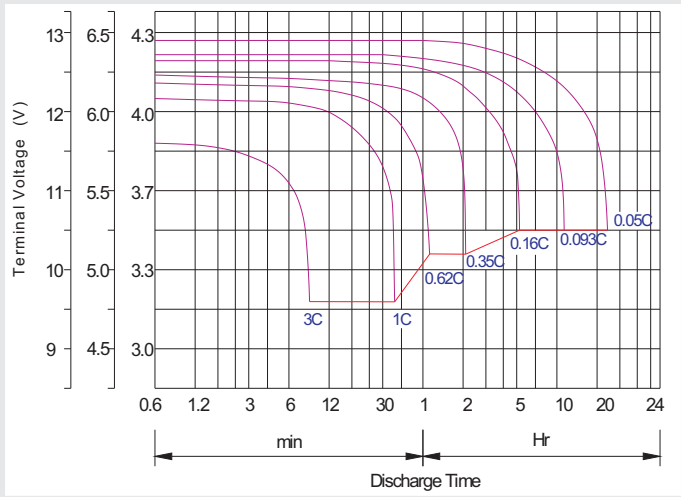

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h