



RL22500D (2V2500Ah)

RL22500D is AGM Deep cycle battery with 18 years floating design life, specially designed for frequent cyclic discharge usage. By using strong grid and specific paste plate, it makes battery have 30% more cyclic life time than standby series. It is applicable for solar energy system, golf cart, electric wheelchair, etc..



Specification

Cells Per Unit	1
Voltage Per Unit	2
Capacity	2500Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 171.0 Kg
Max. Discharge Current	8000 A (5 sec)
Internal Resistance	Approx. 0.35 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	2.27 to 2.3 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	500 A
Equalization and Cycle Service	2.43 to 2.47 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Thread insert & Bolt (F10)
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539




G4M20206-0910-E-16



ISO9001:2000 Certificate

Dimensions

Unit: mm Dimension: 712(L)×351(W)×338(H)

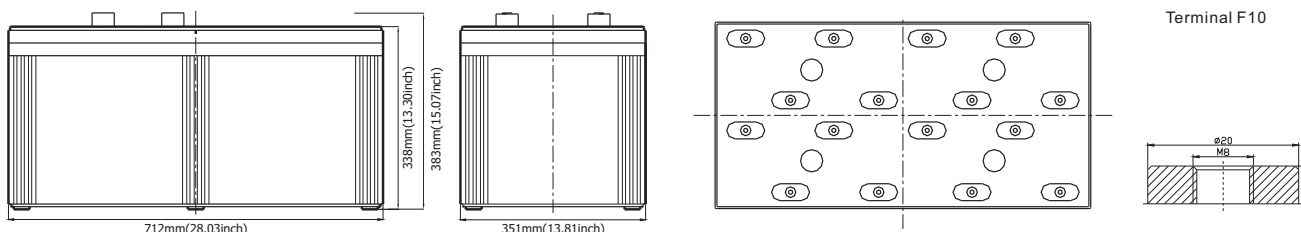

Constant Current Discharge Characteristics : A(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	3394	2503	1611	957.6	713.2	568.6	478.8	402.1	324.6	271.3
1.65V	3228	2404	1541	922.7	683.3	548.6	458.9	392.4	310.1	266.6
1.70V	3010	2266	1511	907.7	668.3	543.6	453.9	382.8	305.2	261.8
1.75V	2672	2039	1392	857.9	633.4	513.7	433.9	363.4	295.5	256.9
1.80V	2300	1857	1312	818.0	608.5	508.7	419.0	358.5	290.7	252.1
1.85V	1945	1672	1212	773.1	578.6	468.8	399.0	339.2	276.2	235.1

Constant Power Discharge Characteristics : W(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	5942	4562	2950	1774	1329	1068	904.9	775.9	617.7	523.8
1.65V	5787	4538	2940	1748	1303	1053	894.6	766.0	612.5	518.9
1.70V	5466	4295	2886	1723	1283	1048	886.7	748.2	603.1	510.8
1.75V	4869	3870	2658	1631	1237	995.9	849.5	711.3	584.1	502.7
1.80V	4215	3531	2507	1557	1186	991.3	821.9	702.9	574.7	484.7
1.85V	3594	3184	2317	1474	1130	918.2	784.4	665.9	546.1	466.7

All mentioned values are average values.

Life characteristics of cyclic use

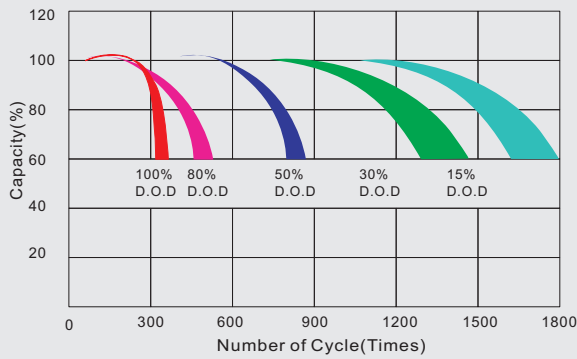


Storage characteristic

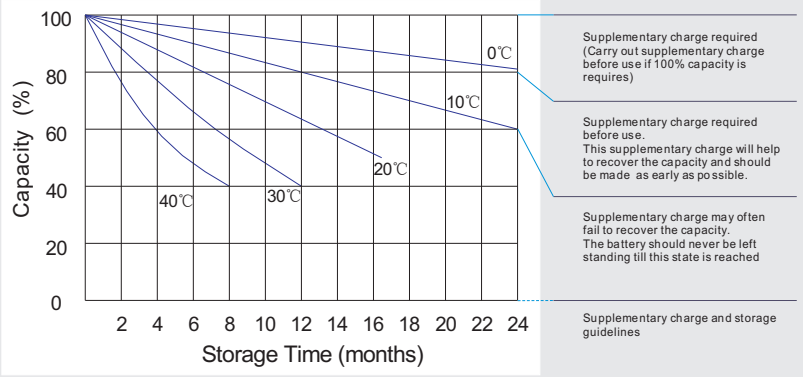

Charge characteristic curve for cyclic use



Discharge characteristic curve

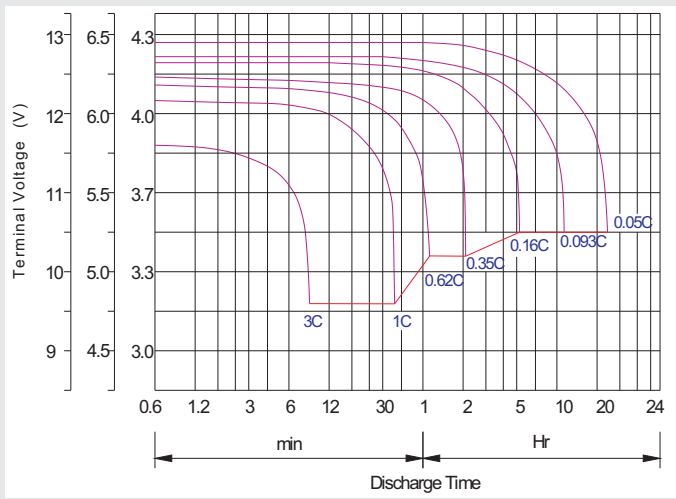

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.