



# HR12-240WA(12V240W)

## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	240W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 17.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 6.5 mΩ
Terminal	F11(M6)
Max. Discharge Current	650A (5 sec)
Short Circuit Current	1650A
Design Life	15 years
Max. Charging Current	19.5 A
Reference Capacity	C10 61.3AH C20 65.0AH
Standby Use Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Equalization Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



HR ( High Rate ) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 15 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The HR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.



ISO 9001



ISO 14001




OHSAS 18001



MH 28539



## Dimensions

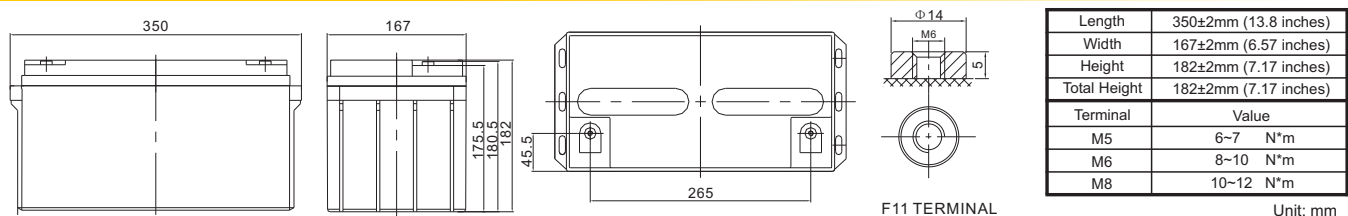

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	232.7	194.6	172.2	132.7	108.1	79.66	46.10	33.09
1.67V	211.1	178.4	159.2	123.8	101.6	75.38	43.98	31.74
1.70V	202.1	171.5	153.5	120.0	98.74	73.57	43.10	31.12
1.75V	186.6	159.8	143.9	113.5	93.81	70.45	41.60	30.14
1.80V	171.0	148.0	134.3	107.4	89.39	67.47	40.11	29.16
1.85V	146.8	126.0	113.8	92.38	77.59	59.68	36.23	26.59

### Constant Power Discharge Characteristics : WPC (25°C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	427.5	362.4	324.0	253.0	207.7	154.8	86.6	62.6
1.67V	397.9	340.0	305.7	240.0	198.3	148.4	83.3	60.5
1.70V	384.8	329.8	297.2	234.4	194.0	145.4	82.0	59.7
1.75V	361.1	311.6	282.3	224.3	186.2	140.6	79.7	58.1
1.80V	336.1	292.5	266.5	214.3	179.2	135.7	77.3	56.5
1.85V	292.8	252.7	228.8	186.3	157.0	121.1	70.3	52.0

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

# HR12-240WA (12V240W)



## Discharge Characteristics Curve




## Charge Characteristic Curve For Standby Use




## Storage Characteristics




## Relationship Between Charging Voltage And Temperature

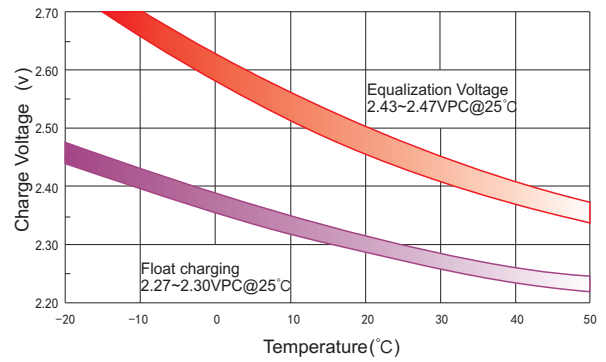


## Temperature Effects On Capacity

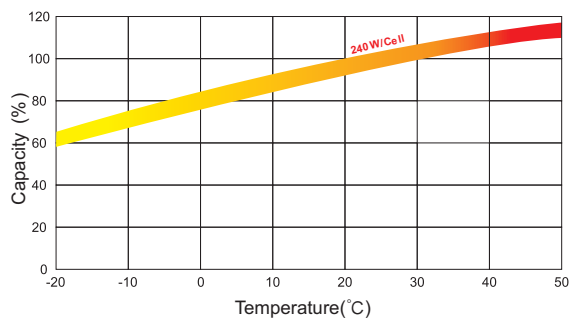


## Relationship of OCV And State of Charge (20°C)

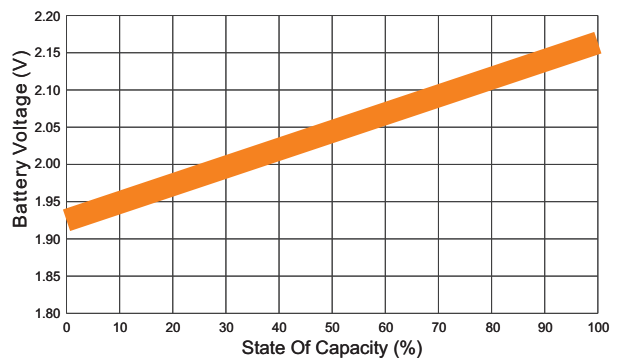

## Effect Of Temperature On Long Term Life

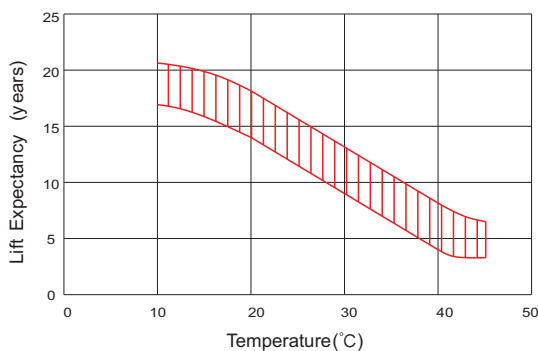

## Life Characteristics Of Standby Use

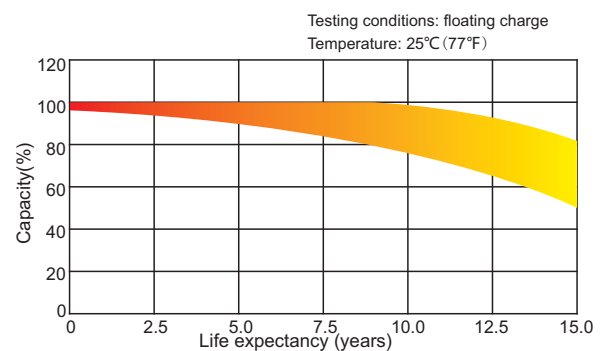

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.