



HR6-18W(6V18W)

Specification



HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The HR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.



ISO 9001

ISO 14001


OHSAS 18001



MH 28539

| | |
|---|---|
| Cells Per Unit | 3 |
| Voltage Per Unit | 6 |
| Capacity | 18W@15min-rate to 1.67V per cell @25°C |
| Weight | Approx. 0.7 Kg (Tolerance±5.0%) |
| Internal Resistance | Approx. 24 mΩ |
| Terminal | F2 |
| Max. Discharge Current | 45A (5 sec) |
| Short Circuit Current | 251A |
| Design Life | Could Reach 8 years |
| Max. Charging Current | 1.35A |
| Reference Capacity | C10 4.2AH C20 4.5AH |
| Standby Use Voltage | 6.8 V~6.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell |
| Equalization Voltage | 7.3 V~7.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C±5°C |
| Self Discharge | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using. |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |

Dimensions

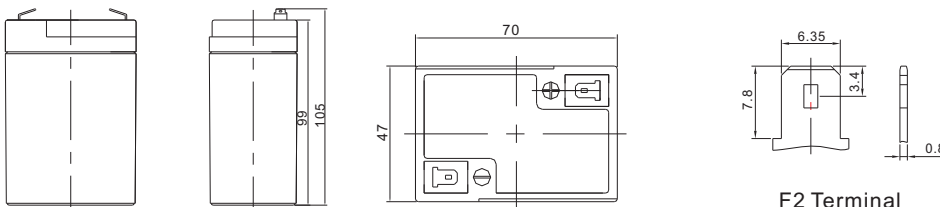

| | | |
|--------------|-------------------------|-----|
| Length | 70±1.5mm (2.76 inches) | |
| Width | 47±1.5mm (1.85 inches) | |
| Height | 99±1.5mm (3.90 inches) | |
| Total Height | 105±1.5mm (4.13 inches) | |
| Terminal | Value | |
| M5 | 6~7 | N*m |
| M6 | 8~10 | N*m |
| M8 | 10~12 | N*m |

F2 Terminal

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

| F.V/Time | 3MIN | 5MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 60MIN | 90MIN |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V | 23.47 | 20.63 | 16.49 | 14.13 | 10.43 | 8.194 | 5.838 | 3.274 | 2.321 |
| 1.67V | 21.30 | 18.72 | 15.08 | 13.03 | 9.750 | 7.734 | 5.532 | 3.121 | 2.222 |
| 1.70V | 20.38 | 17.91 | 14.48 | 12.55 | 9.450 | 7.528 | 5.395 | 3.052 | 2.180 |
| 1.75V | 18.88 | 16.59 | 13.49 | 11.76 | 8.925 | 7.152 | 5.170 | 2.950 | 2.114 |
| 1.80V | 17.29 | 15.20 | 12.47 | 10.97 | 8.475 | 6.816 | 4.944 | 2.839 | 2.039 |
| 1.85V | 14.78 | 13.00 | 10.62 | 9.316 | 7.268 | 5.920 | 4.373 | 2.566 | 1.865 |

Constant Power Discharge Characteristics : WPC (25°C)

| F.V/Time | 3MIN | 5MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 60MIN | 90MIN |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V | 42.18 | 37.08 | 29.73 | 25.58 | 19.05 | 15.09 | 10.79 | 6.139 | 4.393 |
| 1.67V | 38.76 | 34.07 | 27.56 | 23.92 | 18.00 | 14.40 | 10.39 | 5.909 | 4.244 |
| 1.70V | 37.42 | 32.89 | 26.67 | 23.21 | 17.63 | 14.09 | 10.15 | 5.815 | 4.178 |
| 1.75V | 35.00 | 30.76 | 25.13 | 22.03 | 16.80 | 13.55 | 9.824 | 5.653 | 4.070 |
| 1.80V | 32.49 | 28.56 | 23.51 | 20.76 | 16.05 | 13.02 | 9.502 | 5.491 | 3.962 |
| 1.85V | 28.23 | 24.82 | 20.31 | 17.84 | 13.95 | 11.41 | 8.455 | 4.996 | 3.639 |

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


HR6-18W(6V18W)



Discharge Characteristics Curve




Charge Characteristic Curve For Standby Use

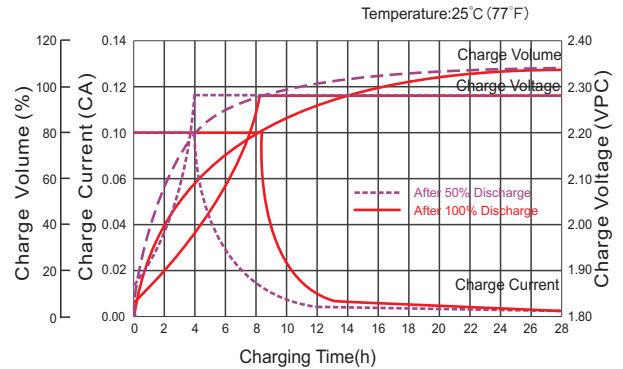


Storage Characteristics




Relationship Between Charging Voltage And Temperature

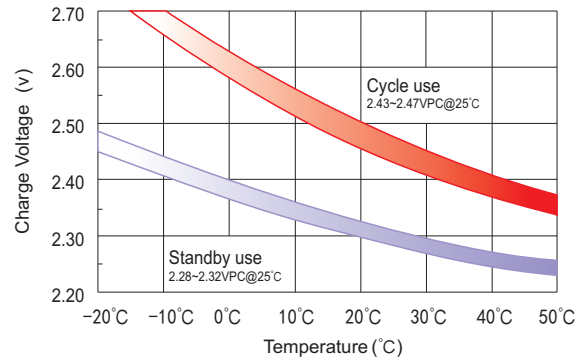


Temperature Effects On Capacity

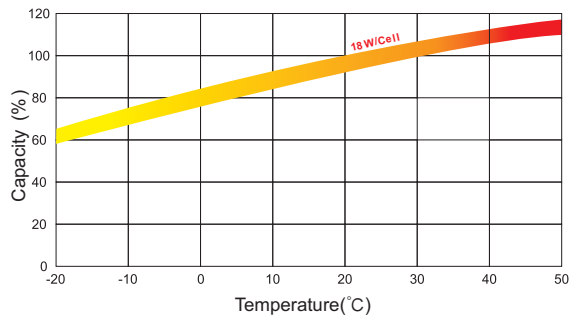


Relationship of OCV And State of Charge(20°C)

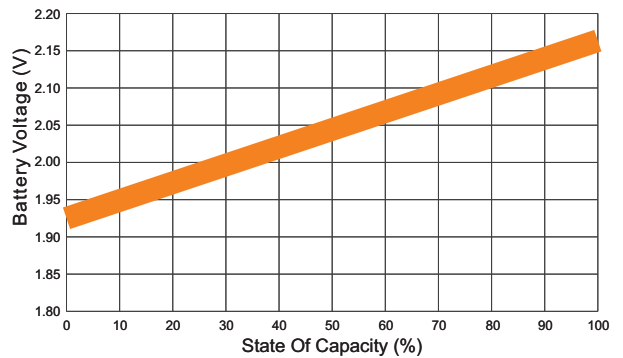

Effect Of Temperature On Long Term Life

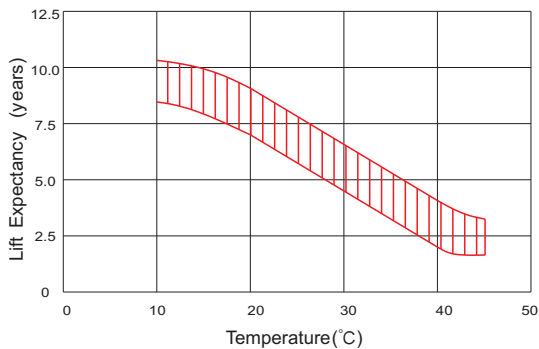

Life Characteristics Of Standby Use

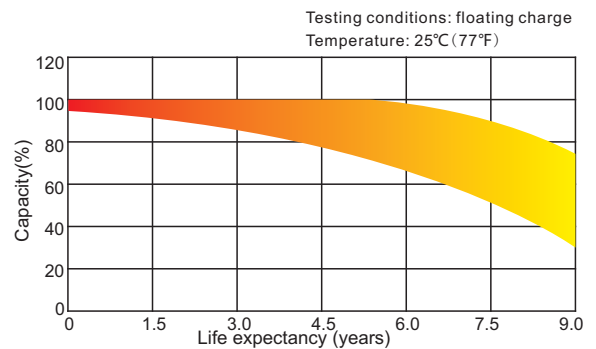

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.