



RL2-400S (2V400Ah)

Specification

Cells Per Unit	1
Voltage Per Unit	2
Nominal Capacity	400Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 26.0 Kg (Tolerance ± 3.0%)
Internal Resistance	Approx. 0.67 mΩ
Terminal	F10(M8)
Max. Discharge Current	2000A (5 sec)
Short Circuit Current	3400A
Design Life	20 years (Float charging)
Max. Charging Current	80 A
Reference Capacity	C1 220.0AH C3 309.6AH C5 349.0AH C10 400.0AH
Standby Use Voltage	2.27 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.43 V~2.47 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: -0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging be stored for up to 6 months at 25°C and then recharging than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RL series is a general purpose battery with 20 years design life in float service. It meets with heavy duty grids, thicker plates, special additives and advanced AGM valve regulated technology, the RL series battery provides consistent performance and long service life. The new grid design effectively reduces the internal resistance, which provides higher specific energy density and excellent high rate discharge characteristics. It is suitable for communications back-up power and EPS/UPS applications.



ISO 9001



ISO 14001



OHSAS 18001







MH 28539



G4M20206-0910-E-16

Dimensions



F10 TERMINAL

Length	208±2mm (8.19 inches)
Width	196±2mm (7.72 inches)
Height	240±2mm (9.45 inches)
Total Height	246±2mm (9.69 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	640.4	398.7	244.4	150.5	112.8	90.8	75.5	50.7	42.2
1.65V	600.0	382.8	236.0	145.7	109.3	88.4	73.5	50.1	41.7
1.70V	562.0	365.9	228.3	140.9	106.4	86.0	71.6	49.4	41.1
1.75V	523.0	349.7	220.0	136.0	103.2	83.8	69.8	48.7	40.5
1.80V	482.9	334.2	211.6	131.1	100.0	81.3	68.0	47.9	40.0
1.85V	400.7	287.9	189.8	120.1	92.4	75.6	63.4	44.9	37.7

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	1120	724.2	459.3	285.3	215.5	174.4	145.5	99.0	83.0
1.65V	1064	702.5	446.1	277.5	209.7	170.3	142.2	98.1	82.1
1.70V	1011.9	678.2	434.3	269.8	204.9	166.3	139.0	96.8	80.9
1.75V	955.3	654.9	420.9	261.6	199.6	162.6	136.0	95.7	80.0
1.80V	894.6	632.3	407.2	253.5	194.2	158.5	132.9	94.3	79.0
1.85V	752.9	550.0	367.4	233.5	180.4	147.9	124.4	88.7	74.5

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C10 should reach 95% after the first cycle and 100% after the third cycle.


RL2-400S (2V400Ah)




Discharge Characteristics Curve

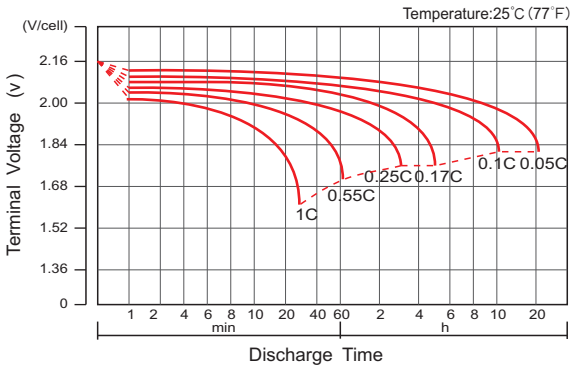


Charge Characteristic Curve For Standby Use

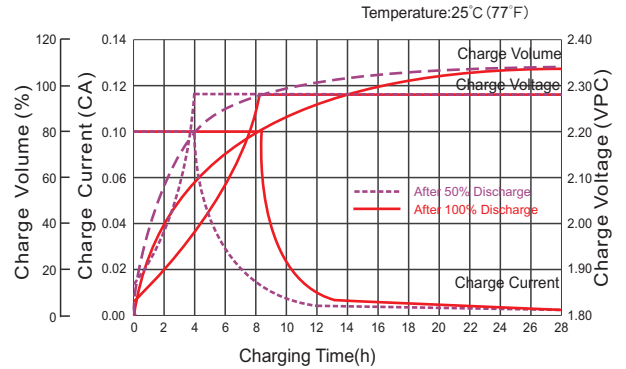


Cycle Life In Relation To Depth Of Discharge

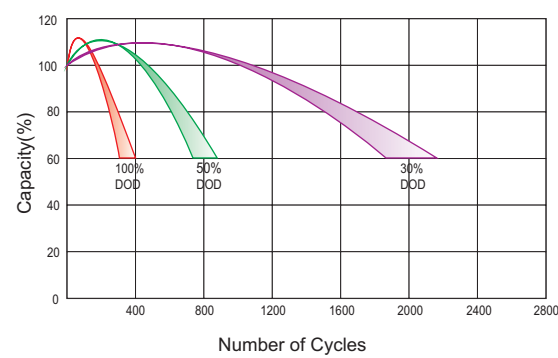


Relationship Between Charging Voltage And Temperature

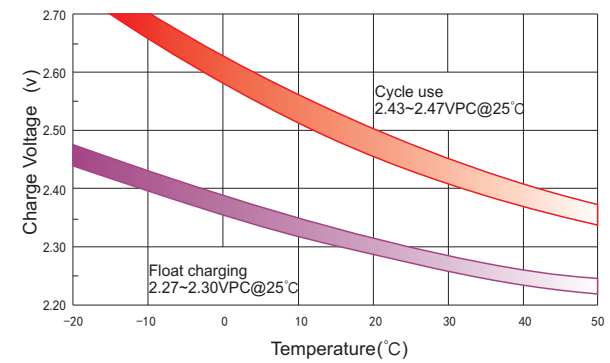


Temperature Effects On Capacity

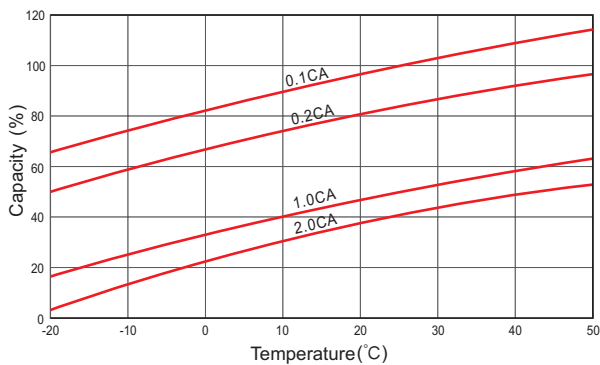


Storage Characteristics

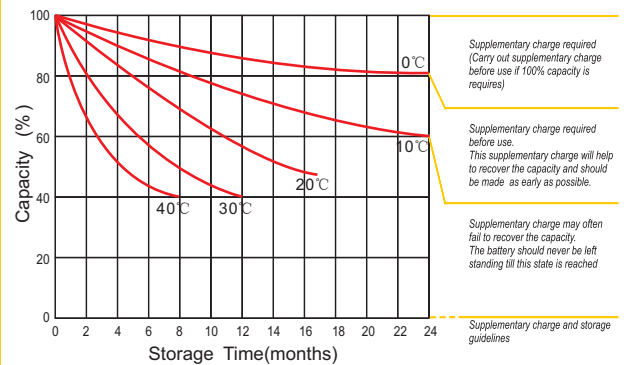

Effect Of Temperature On Long Term Life

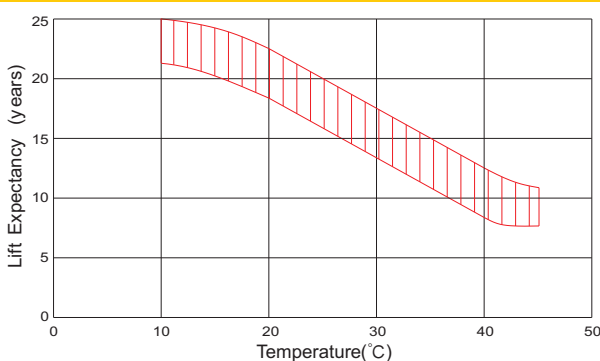

Charge Characteristic Curve For Standby Use

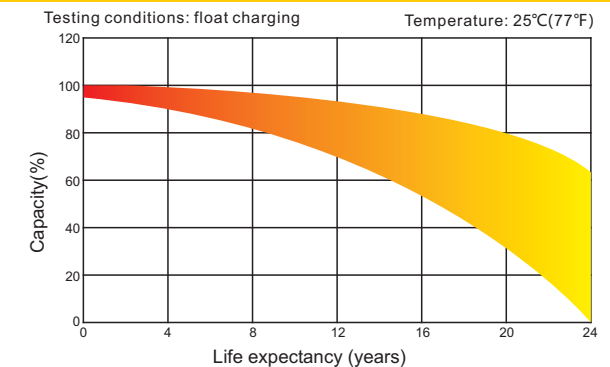

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.

HENGYANG RITAR POWER CO.,LTD.
 URL: www.ritarpower.com

Add: No.1 Huagong Road, Songmu Industrial Park, Shigu District, Hengyang, Hunan, China 421001
 Tel: +86-734-8595528 Fax: +86-734-8595518 E-mail: sales@ritarpower.com

Version 19B-0