



EV6-200(6V200Ah)



Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	200Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 30.0 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 2.4 mΩ
Terminal	F14(M8)
Max. Discharge Current	2000A (5 sec)
Cold Cranking Ampere(CCA)	720A
Maxi. Charging Current	60.0A
Reference Capacity	C3 154.8AH
	C5 174.5AH
	C10 200.0AH
	C20 212.0AH
Float Charging Voltage	6.8 V~6.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.3 V~7.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C
	Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



EV (Electric Vehicle) series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the EV series battery offers reliable performance in high load situations and could provide competitive cycle performance. It is suitable for Electric Vehicle and Golf cart, Floor Machines, Forklifts, Aerial lifts, Robotics, Marine, RV, Mobility and Medical Equipment, and most outdoor application.




ISO 9001 ISO 14001 OHSAS 18001



MH 28539 G4M20206-0910-E-16

Dimensions

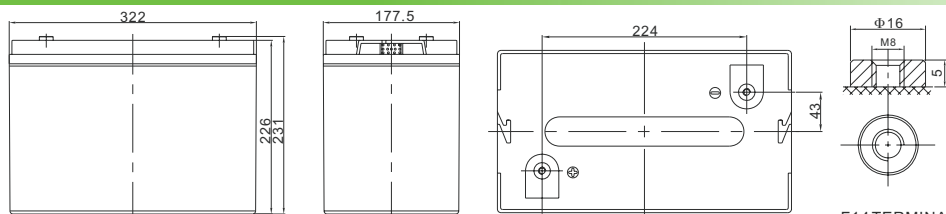

Length	322±2mm (12.7 inches)
Width	177.5±2mm (6.99 inches)
Height	226±2mm (8.90 inches)
Total Height	231±2mm (9.09 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F14 TERMINAL

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	456.9	362.8	221.2	123.4	72.9	56.5	44.4	37.8	25.4	21.1	11.0
1.65V	431.7	346.9	212.3	119.2	70.6	54.7	43.2	36.8	25.1	20.8	10.9
1.70V	397.5	324.9	202.9	115.3	68.2	53.2	42.0	35.8	24.7	20.5	10.7
1.75V	363.8	302.3	194.0	111.1	65.8	51.6	40.9	34.9	24.4	20.3	10.6
1.80V	329.3	279.2	185.4	106.8	63.5	50.1	39.8	34.0	24.0	20.0	10.5
1.85V	269.2	231.7	159.7	95.8	58.2	46.3	37.0	31.7	22.5	18.8	10.0

Constant Power Discharge Characteristics : WPC(25°C)









F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	776.6	634.3	401.7	231.9	138.1	107.9	85.2	72.8	49.6	41.5	21.7
1.65V	748.0	615.4	389.7	225.3	134.4	105.0	83.2	71.2	49.1	41.0	21.4
1.70V	701.3	585.0	376.2	219.3	130.7	102.6	81.2	69.6	48.5	40.5	21.2
1.75V	653.5	552.3	363.3	212.6	126.7	99.9	79.5	68.1	47.9	40.0	21.0
1.80V	601.9	517.2	350.7	205.6	122.8	97.2	77.5	66.5	47.2	39.5	20.8
1.85V	500.6	435.3	305.1	185.5	113.1	90.3	72.3	62.3	44.4	37.3	19.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C10 should reach 95% after the first cycle and 100% after the third cycle.



EV6-200(6V200Ah)

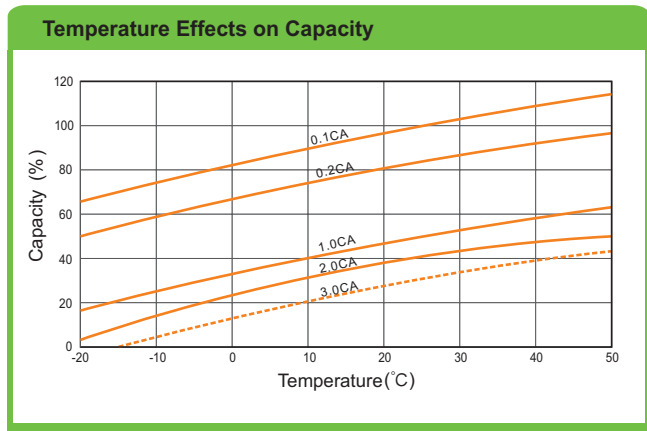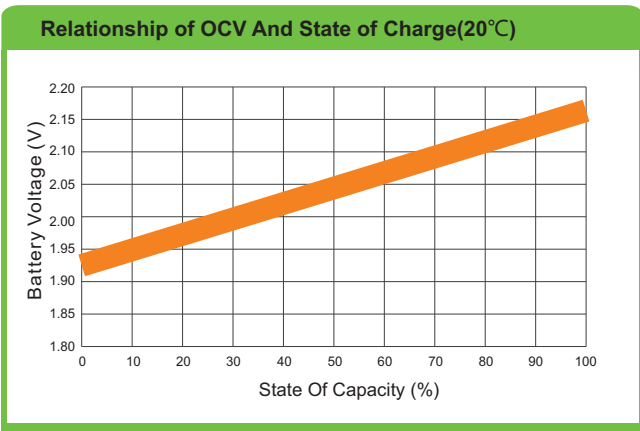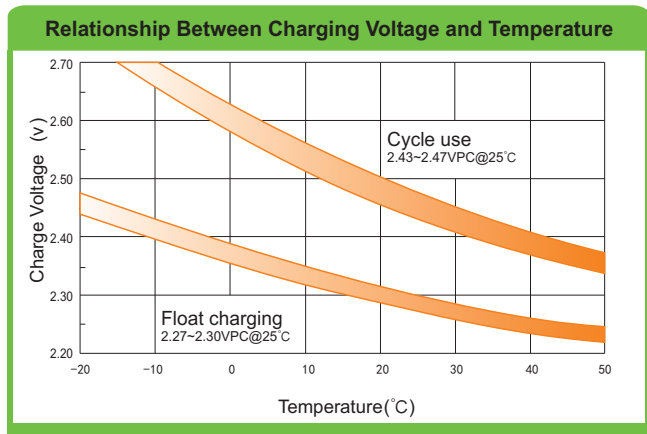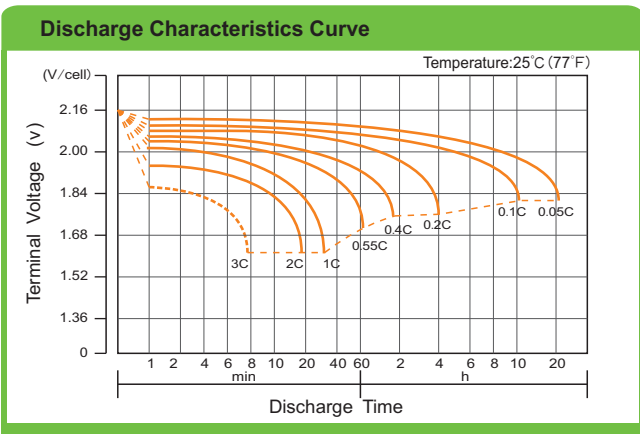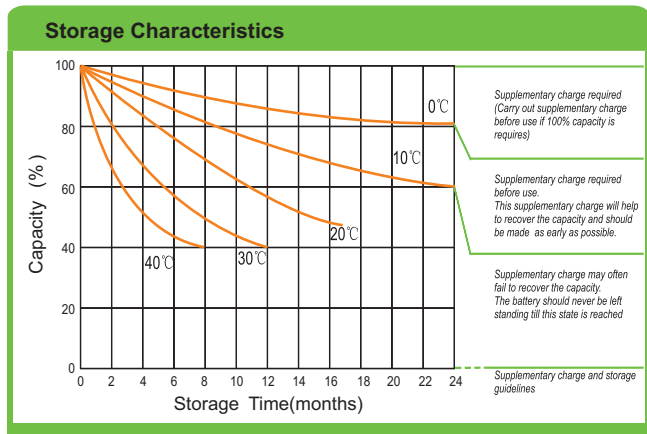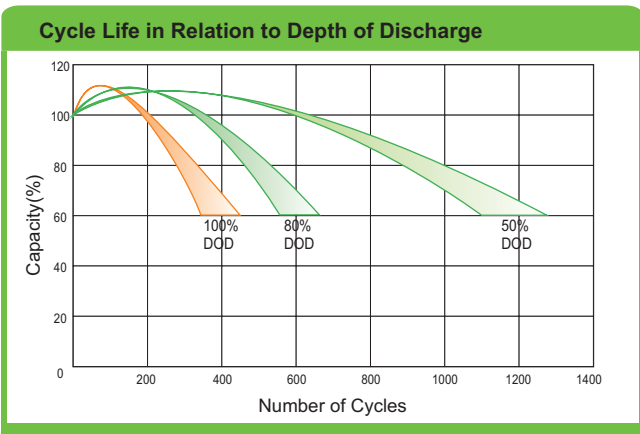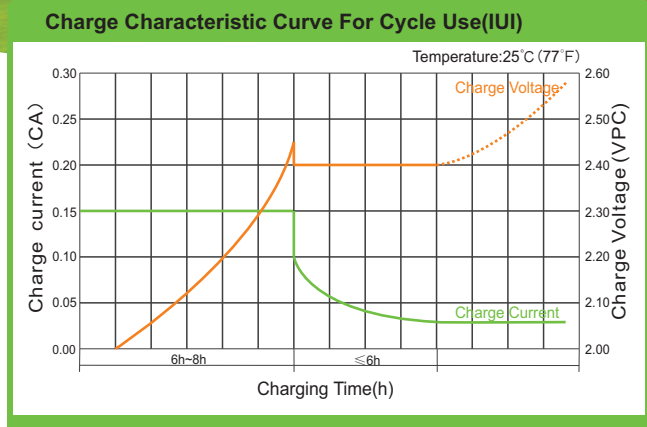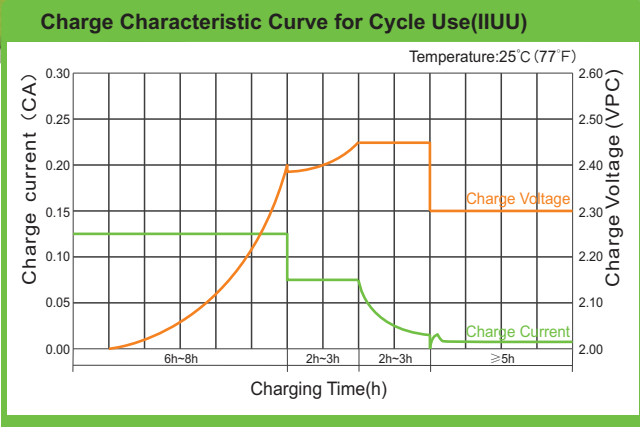

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.