



# RT12280SD (12V28Ah)

RT12280SD is AGM Deep cycle battery with 5 years floating design life, specially designed for frequent cyclic discharge usage. By using strong grid and specific paste plate, it makes battery have 30% more cyclic life time than standby series. It is applicable for solar energy system, golf cart, electric wheelchair, etc..




## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	28Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 10.0 Kg
Max. Discharge Current	280 A (5 sec)
Internal Resistance	Approx. 9 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.7 to 13.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	8.4 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F7/F11
Container Material	A.B.S. (UL94-HB) , Flammability resistance of UL94-V1 can be available upon request.

MH28539  
G4M20206-0910-E-16  
ISO9001:2000 Certificate

## Dimensions

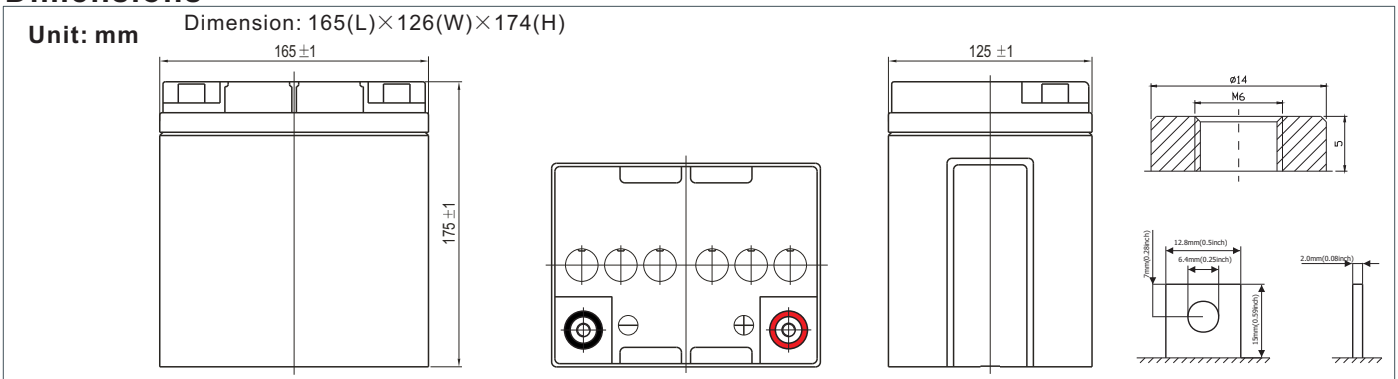

### Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	108.2	71.66	56.17	31.86	19.52	11.24	7.638	6.112	5.076	3.233	2.799	1.571
10.0V	104.3	69.87	54.37	31.45	18.98	11.01	7.497	6.028	4.990	3.220	2.770	1.514
10.2V	98.1	66.41	52.86	30.97	18.81	10.90	7.430	5.969	4.936	3.191	2.728	1.486
10.5V	88.21	62.10	49.86	30.12	18.44	10.75	7.364	5.911	4.877	3.163	2.714	1.442
10.8V	79.03	57.91	47.04	29.12	18.10	10.67	7.278	5.882	4.825	3.150	2.669	1.357
11.1V	69.15	53.09	43.40	28.02	17.62	10.24	7.136	5.830	4.776	3.125	2.627	1.335

### Constant Power Discharge Characteristics: W (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	1138	762.2	601.3	364.7	226.6	131.1	89.28	72.33	60.09	38.71	33.53	18.83
10.0V	1108	746.4	592.7	360.9	223.3	130.0	89.11	72.16	59.79	38.56	33.22	18.16
10.2V	1054	716.8	584.9	357.8	221.6	129.2	88.77	71.56	59.20	38.27	32.90	17.82
10.5V	962	687.3	554.4	350.5	218.6	128.2	88.41	70.91	58.50	37.95	32.56	17.32
10.8V	868	642.9	523.8	342.2	215.1	127.1	87.37	70.65	57.89	37.78	32.06	16.31
11.1V	765	598.6	493.3	332.8	211.1	122.7	85.67	69.94	57.34	37.52	31.59	16.05


All mentioned values are average values.

# RT12280SD

12V28Ah



## Life characteristics of cyclic use

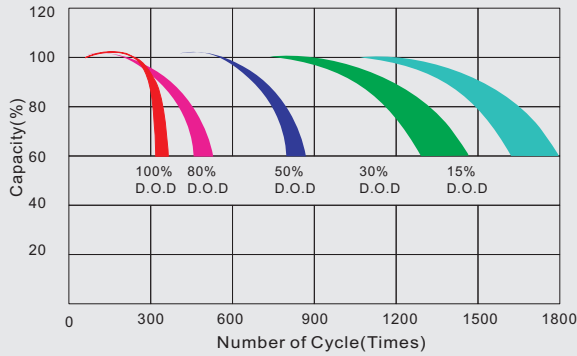


## Storage characteristic



## Charge characteristic curve for cyclic use



## Discharge characteristic curve

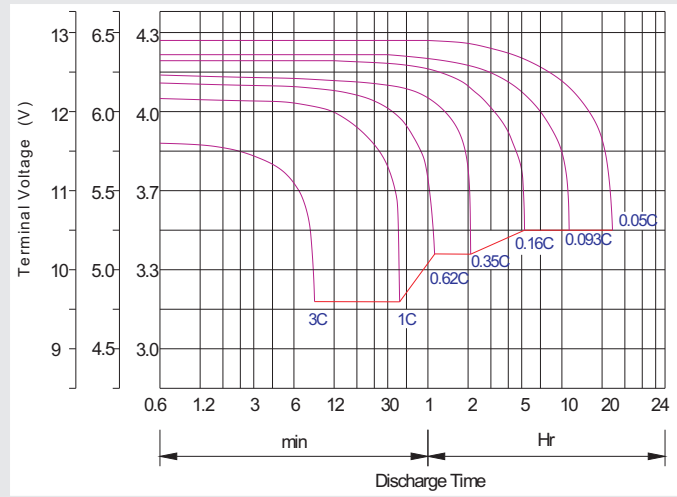

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

## Maintenance & Cautions

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

<b>Cycle service</b>
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.