



FT12-110A (12V110Ah)

Specification

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	110Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 29.5 Kg (Tolerance ±3%)
Internal Resistance	Approx. 6.5 mΩ
Terminal	F9(M8)
Max. Discharge Current	1100A (5 sec)
Design Life	12 years (Float charging)
Recommended Maximum Charging Current	33.0 A
Reference Capacity	C3 85.2AH C5 96.0AH C10 110.0AH C20 116.6AH
Standby Use Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



FT (Front Terminal) Series is specially designed for telecom use with 12 years design life in float service. By adopting a new AGM separator and centralized venting system, the battery can be installed in any position while maintaining high reliability. The dimensions of the FT series are designed for 19" and 23" cabinet installation. It is suitable for telecom EPS/UPS applications.



ISO 9001



ISO 14001






OHSAS 18001



MH 28539



Dimensions



F9 Terminal

Length	410±2mm (16.1 inches)
Width	109±2mm (4.29 inches)
Height	285±2mm (11.2 inches)
Total Height	293±2mm (11.5 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	192.5	118.1	67.2	40.0	31.0	24.4	20.8	13.9	11.6	6.07
1.65V	184.0	113.3	64.9	38.8	30.1	23.7	20.2	13.8	11.5	5.97
1.70V	172.3	108.3	62.8	37.5	29.3	23.1	19.7	13.6	11.3	5.90
1.75V	160.4	103.5	60.5	36.2	28.4	22.5	19.2	13.4	11.1	5.83
1.80V	148.1	99.0	58.2	34.9	27.5	21.8	18.7	13.2	11.0	5.77
1.85V	122.9	85.2	52.2	32.0	25.42	20.3	17.4	12.4	10.4	5.48

Constant Power Discharge Characteristics : WPC (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	336.5	214.4	126.3	75.9	59.3	46.8	40.0	27.2	22.8	12.0
1.65V	326.4	208.0	122.7	73.8	57.7	45.7	39.1	27.0	22.6	11.8
1.70V	310.3	200.8	119.4	71.8	56.4	44.6	38.2	26.6	22.3	11.7
1.75V	293.0	193.9	115.8	69.6	54.9	43.7	37.4	26.3	22.0	11.5
1.80V	274.3	187.2	112.0	67.4	53.4	42.6	36.6	25.9	21.7	11.4
1.85V	230.9	162.8	101.0	62.1	49.60	39.7	34.2	24.4	20.5	10.9

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.

FT12-110A(12V110Ah)



Discharge Characteristics Curve



Charge Characteristic Curve For Standby Use



Cycle Life In Relation To Depth Of Discharge



Relationship Between Charging Voltage And Temperature




Temperature Effects On Capacity



Storage Characteristics



Effect Of Temperature On Long Term Life

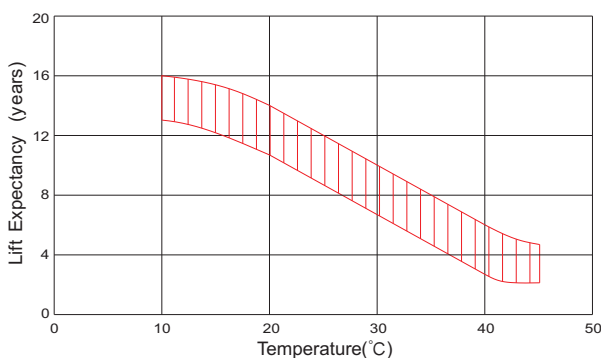

Life Characteristics Of Standby Use



(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.